
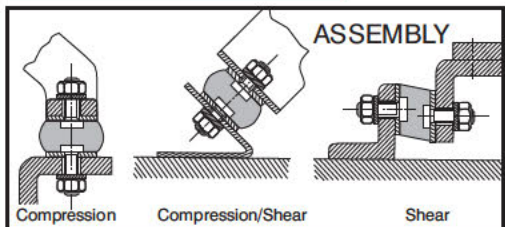


STUD MOUNTS, Series DS

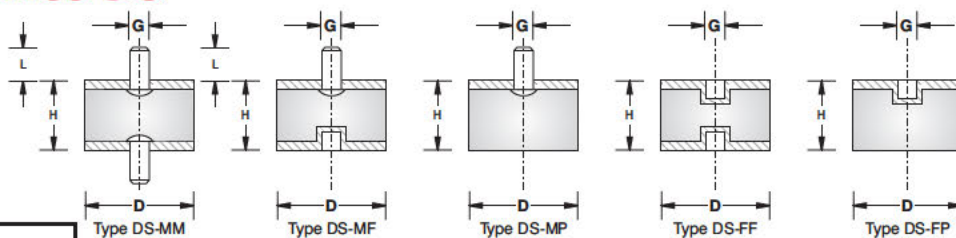

DYNEMECH Stud Mounts, Series DS are highly effective and compact vibration dampers for a variety of applications like Compressors, Pumps, ID & FD fans, Motors, Machine tools, Gensets, Air Conditioners, Measuring and Testing Equipments /Instruments, Material Handling Equipments, Laboratory Equipments etc. These mounts can be used for load applications in both compression and shear.

MODEL	D mm	H mm	G Thread	L mm	LOAD Kgs.	NATURAL FREQUENCY Hz
DS a 10-10	10	10	M4	16	2	12
DS b 10-10	10	10	M4	16	4	15
DS c 10-10	10	10	M4	16	6.5	15
DS a 15-15	15	15	M4	16	4	12
DS b 15-15	15	15	M4	16	9	12
DS c 15-15	15	15	M4	16	15	12
DS a 20-15	20	15	M6	16	9	12
DS b 20-15	20	15	M6	16	18	12
DS c 20-15	20	15	M6	16	25	12
DS a 20-25	20	25	M6	16	7	10
DS b 20-25	20	25	M6	16	16	10
DS c 20-25	20	25	M6	16	24	12
DS a 25-25	25	25	M8	33	12	12
DS b 25-25	25	25	M8	33	28	12
DS c 25-25	25	25	M8	33	39	12
DS a 25-30	25	30	M8	33	10	9
DS b 25-30	25	30	M8	33	22	9
DS c 25-30	25	30	M8	33	30	9
DS a 30-30	30	30	M8	33	17	8
DS b 30-30	30	30	M8	33	37	8
DS c 30-30	30	30	M8	33	57	9
DS a 40-30	40	30	M10	38	34	7
DS b 40-30	40	30	M10	38	70	8
DS c 40-30	40	30	M10	38	110	8
DS a 40-40	40	40	M10	38	30	7
DS b 40-40	40	40	M10	38	60	8
DS c 40-40	40	40	M10	38	95	8
DS a 50-45	50	45	M10	38	55	8
DS b 50-45	50	45	M10	38	110	8
DS c 50-45	50	45	M10	38	160	8
DS a 60-25	60	25	M10	38	85	6
DS b 60-25	60	25	M10	38	170	7
DS c 60-25	60	25	M10	38	250	7
DS a 60-45	60	45	M10	38	75	7
DS b 60-45	60	45	M10	38	150	7
DS c 60-45	60	45	M10	38	200	7
DS a 75-55	75	55	M16	48	125	6
DS b 75-55	75	55	M16	48	275	7
DS c 75-55	75	55	M16	48	400	7
DS a 100-55	100	55	M16	48	250	7
DS b 100-55	100	55	M16	48	500	7
DS c 100-55	100	55	M16	48	750	7
DS a 150-55	150	55	M16	48	450	7
DS b 150-55	150	55	M16	48	800	8
DS c 150-55	150	55	M16	48	1300	8